Tempered glass outer window

Upgraded!

RCS10TS - 1000 Watt Model
Ideal Applications:
- Server stations
- Supermarkets
- Recreation centers
- Convenience stores

Upgraded!

RCS10DS - 1000 Watt Model
Ideal Applications:
- Coffee shops
- Ethnic restaurants
- Concessions
- Dessert stations

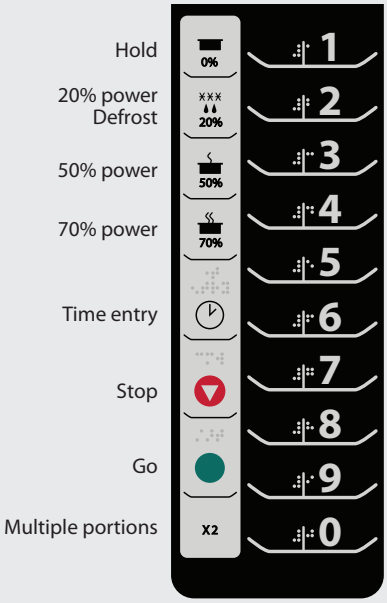

New touch pad icons and Braille for ADA compliance

RCS Series | Microwave Cooking Features, Advantages and Benefits

- **1000 watts of cooking power**
  Quick heating
  Consistent results
- **Stainless steel construction inside and out**
  Durable, professional finish
  Withstands the foodservice environment
- **1.2 cubic ft. (.034 m^3) oven capacity, larger than comparable competitive ovens**
  *Accommodates a **14" (356 mm)** platter*
  Easily heats large portions
- **Motor driven top antenna**
  Reliable distribution of energy
  Consistent heating results
- **Front air filter**
  Non-removable, cannot lose
  Promotes proper oven operation
- **Grab 'n Go handle**
  No moving parts
  Reliable, long lasting
- **Tempered glass outer oven door window, competition uses plastic**
  Reliable, long lasting
  Monitor cooking without oven light
- **Touch controls - RCS10TS**
  100 programmable menu items, 4 stages of cooking, 5 microwave power levels and Braille touch pads
  Versatile program options
- **Dial controls - RCS10D**
  6:00 light up dial timer, 100% microwave power, 1 cooking stage
  Manual reset to zero when cooking cycle is interrupted

RCS ovens deliver delicious results.

Mexican platter, 30 second boost heat

Specification Comparison

	Electrical Properties			Dimensions Cabinet	Dimensions Cavity				
Model	Wattage	Power Source	Plug Configuration	H x W x D** Inches	H x W x D Inches	Capacity Cu Ft.	Safety Listing	Sanitation Listing	Weight Prod. / Ship
AXP20	2200-M* 2000 -C 3000-R	208-240 V 60 HZ 30 A single	NEMA 6-30	H: 20-3/8" W: 25-1/8" D: 20-5/8"	H: 10" W: 16" D: 15"	1.38	Intertek	Intertek	150 lbs. 175 lbs.
ACE14	1400-M* 2700 -C	208-240 V 60 HZ 20 A single	NEMA 6-20	H: 18-1/8" W: 19-3/4" D: 24-1/4"	H: 10-1/2" W: 13" D: 15"	1.2	Intertek	Intertek	95 lbs. 102 lbs.
AOC24	2400-M*	230 V 60 HZ 20 A single	NEMA 6-20	H: 18-5/8" W: 13-5/8" D: 17-3/4"	H: 10" W: 11-3/4" D: 5-3/8"	.312	Intertek	Intertek	70 lbs. 73 lbs.
RC30S2	3000-M*	208-240 V 60 HZ 30 A single	NEMA 6-30	H: 18-1/4" W: 19-1/4" D: 26-1/4"	H: 8-1/2" W: 13" D: 15"	1.0	Intertek	Intertek	115 lbs. 123 lbs.
RC22S2	2200-M*	208-240 V 60 HZ 20 A single	NEMA 6-20	H: 18-1/4" W: 19-1/4" D: 26-1/4"	H: 8-1/2" W: 13" D: 15"	1.0	Intertek	Intertek	94 lbs. 101 lbs.
RC17S2	1700-M*	208-240 V 60 HZ 20 A single	NEMA 6-20	H: 18-1/4" W: 19-1/4" D: 26-1/4"	H: 8-1/2" W: 13" D: 15"	1.0	Intertek	Intertek	94 lbs. 101 lbs.
HDC212	2100-M*	208-240 V 60 HZ 20 A single	NEMA 6-20	H: 13-1/2" W: 16-3/4" D: 22-3/4"	H: 6-3/4" W: 13" D: 12"	.6	Intertek	Intertek	67 lbs. 73 lbs.
HDC182	1800-M*	208-240 V 60 HZ 20 A single	NEMA 6-20	H: 13-1/2" W: 16-3/4" D: 22-3/4"	H: 6-3/4" W: 13" D: 12"	.6	Intertek	Intertek	68 lbs. 74 lbs.
HDC12A2	1200-M*	120 V 60 HZ 20 A single	NEMA 5-20	H: 13-1/2" W: 16-3/4" D: 22"	H: 6-3/4" W: 13" D: 12"	.6	Intertek	Intertek	67 lbs. 73 lbs.
RFS18MPS	1800-M*	208-240 V 60 HZ 20 A single	NEMA 6-20	H: 14-1/4" W: 21-3/4" D: 20-1/4"	H: 9" W: 14-1/4" D: 16-3/8"	1.2	cULus	NSF	67 lbs. 73 lbs.
RFS12MPSB	1200-M*	120 V 60 HZ 20 A single	NEMA 5-20	H: 14-1/4" W: 21-3/4" D: 20-1/4"	H: 9" W: 14-1/4" D: 16-3/8"	1.2	Intertek	NSF	64 lbs. 71 lbs.
RCS10TS	1000-M*	120 V 60 HZ 20 A single	NEMA 5-15	H: 13-3/4" W: 22" D: 19"	H: 8-1/2" W: 14-1/2" D: 15"	1.2	cULus	Intertek	41 lbs. 48 lbs.
RCS10DS	1000-M*	120 V 60 HZ 20 A single	NEMA 5-15	H: 13-3/4" W: 22" D: 19"	H: 8-1/2" W: 14-1/2" D: 15"	1.2	cULus	Intertek	41 lbs. 48 lbs.
RMS10TS	1000-M*	120 V 60 HZ 20 A single	NEMA 5-15	H: 12-1/4" W: 20" D: 15"	H: 7-3/4" W: 13" D: 13"	0.9	cULus	Intertek	32 lbs. 39 lbs.
RMS10T	1000-M*	120 V 60 HZ 20 A single	NEMA 5-15	H: 12-1/4" W: 20" D: 15"	H: 7-3/4" W: 13" D: 13"	0.9	cULus	Intertek	32 lbs. 39 lbs.
RMS10D	1000-M*	120 V 60 HZ 20 A single	NEMA 5-15	H: 12-1/4" W: 20" D: 15"	H: 7-3/4" W: 13" D: 13"	0.9	cULus	Intertek	32 lbs. 39 lbs.

M=Microwave, C=Convection, R= Infra-red Radiant

* IEC 705 Tested ** Includes Handle

ACP INC.™
225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.
800-233-2366 319-368-8120 Fax: 319-368-8198
www.acpsolutions.com
© 2010 ACP, Inc. All rights reserved
Printed in the U.S.A. Form # ACRR0977 Rev. 9/10

Amana® is a Registered trademark of Maytag Corporation.
Brand used under license.